
Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		17871.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	19.8V x 19.7H
	At 50% of Imax	9.7V x 10.3H
	At 90% of Imax	3.5V x 4.7H
Beam Flux	Total	930.4 lumens per klm.
	To 10% of Imax	640.7 lumens per klm.
	To 50% of Imax	306.3 lumens per klm.
	To 90% of Imax	30.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	93.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

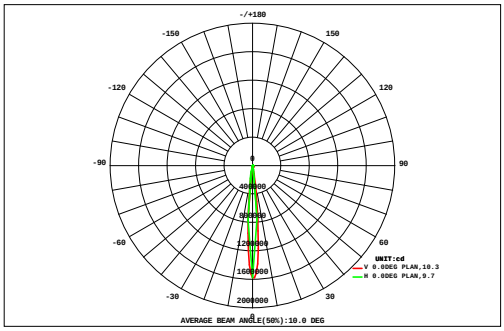

DATA OF LAMP		Eff:117.32lm/W	
MODEL		Imax(cd)	1574657
NOMINAL POWER(W)	750	AVAILABILITY(%)	74.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	65983
NOMINAL FLUX(lm)	88108.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	88109
TEST VOLTAGE(V)	221.0	q @50%(H,V)	10,10DEG

AREA FLUX DIAGRAM UNIT:lm

VERTICAL(DEG)	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG) 20	30	40	50	60	70	80	90	F t	F a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.05	0.39	1.14	2.43	4.19	6.33	8.77	10.9	12.3	12.6	11.6	9.79	7.31	5.03	3.05	1.48	0.47	0.06	98.0	0.00
70	0.08	0.68	2.37	5.48	9.71	15.2	21.6	27.4	31.2	31.6	28.9	23.6	17.1	11.3	6.64	3.05	0.91	0.10	237	0.00
60	0.11	1.09	4.14	9.83	18.1	29.9	42.7	53.7	60.8	61.5	55.9	46.0	33.4	21.3	11.8	5.17	1.45	0.15	457	0.00
50	0.14	1.55	6.15	15.4	30.2	50.6	69.3	84.1	97.8	97.4	85.5	71.0	53.7	34.8	18.4	7.61	2.03	0.19	726	0.00
40	0.17	2.00	8.24	21.5	43.1	66.4	84.2	108	136	140	111	86.1	67.0	47.2	25.2	10.1	2.57	0.24	958	0.00
30	0.20	2.38	10.1	27.2	52.5	72.5	103	160	301	384	193	114	74.4	54.4	31.4	12.4	3.03	0.27	1595	0.00
-30	0.22	2.69	11.6	31.3	56.5	77.7	141	325	1398	2158	529	168	84.0	56.4	35.2	13.8	3.34	0.29	5093	408
-40	0.23	2.83	12.2	33.1	56.6	83.4	190	701	8203	16471	1574	223	92.6	55.9	36.5	14.4	3.51	0.31	27753	23319
-50	0.23	2.84	12.2	32.8	55.5	85.6	232	1059	20140	21892	1414	218	90.4	55.2	36.0	14.2	3.46	0.30	45343	42256
-60	0.22	2.66	11.4	30.6	53.8	76.7	134	359	635	742	330	140	78.8	55.2	33.8	13.2	3.21	0.28	2700	0.00
-70	0.20	2.35	9.99	26.6	49.5	68.6	102	138	133	127	111	102	69.3	52.8	29.5	11.5	2.79	0.24	1037	0.00
-80	0.17	1.95	8.08	21.1	41.1	60.0	74.3	88.9	87.4	78.1	85.9	73.4	62.1	45.2	23.3	9.20	2.29	0.20	763	0.00
-90	0.14	1.52	6.00	15.1	29.3	47.4	60.8	68.3	71.9	72.0	69.3	62.8	50.9	32.3	16.4	6.68	1.72	0.16	613	0.00
	0.11	1.06	3.95	9.48	17.6	29.0	41.7	52.1	58.1	58.8	53.9	44.2	31.3	18.9	10.2	4.34	1.18	0.11	436	0.00
	0.08	0.67	2.29	5.18	8.96	13.6	19.1	24.6	27.9	28.2	25.2	20.2	14.4	9.29	5.41	2.41	0.68	0.07	208	0.00
	0.07	0.41	1.11	2.26	3.73	5.47	7.59	9.41	10.4	10.4	9.53	7.76	5.63	3.82	2.28	1.10	0.38	0.07	81.4	0.00
	0.05	0.20	0.35	0.49	0.64	0.79	0.89	0.98	1.13	1.10	0.90	0.75	0.63	0.49	0.36	0.24	0.14	0.05	10.2	0.00
F t	2.47	27.3	111	290	531	789	1334	3271	31404	42365	4689	1411	833	560	325	131	33.2	3.10	88109	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	233	26908	37660	1181	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	65983


one-half-peak spread: U:4.8,D:5.0 , L:4.6,R:5.8 **NEMA Beam Type: Type 2**

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

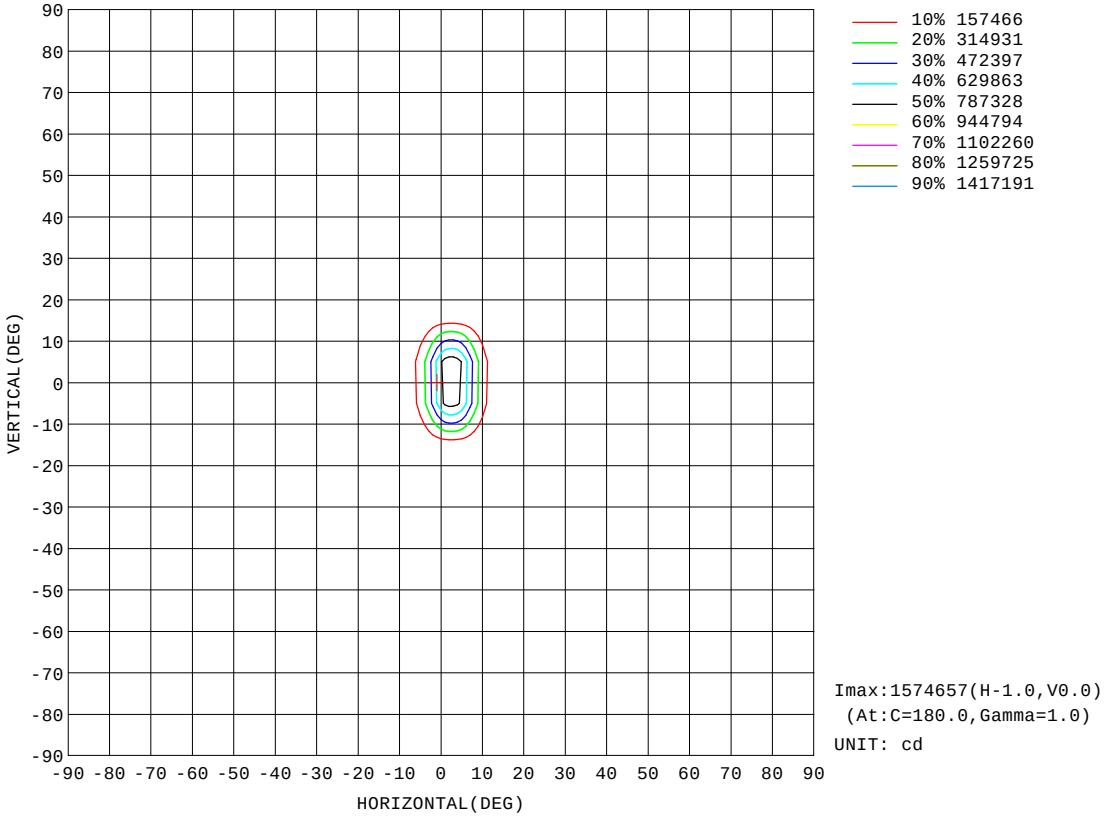

H(b) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(b) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:11.900m [K=1.0000]
Test Date:16 February 2023	Remarks:

ISOLUX DIAGRAM


Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

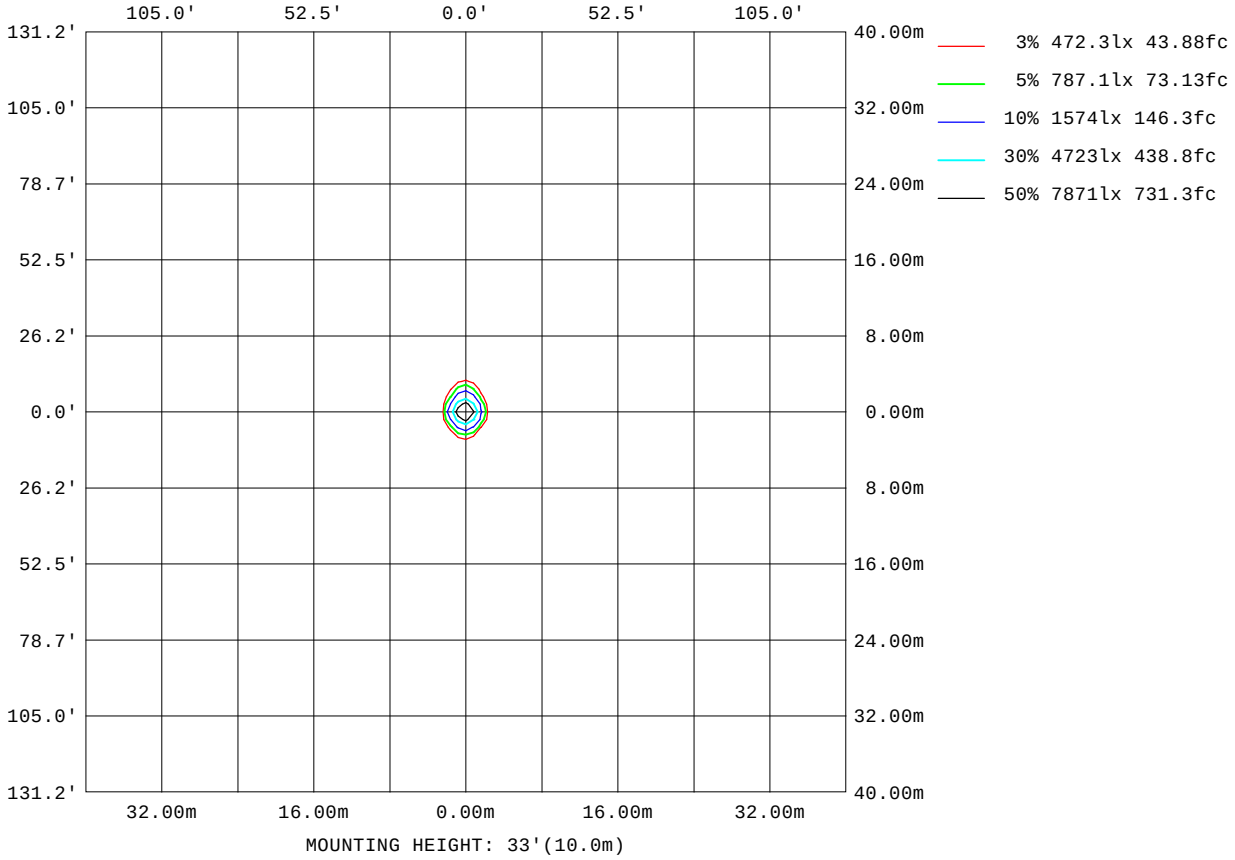

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

Planar Illuminance Curve

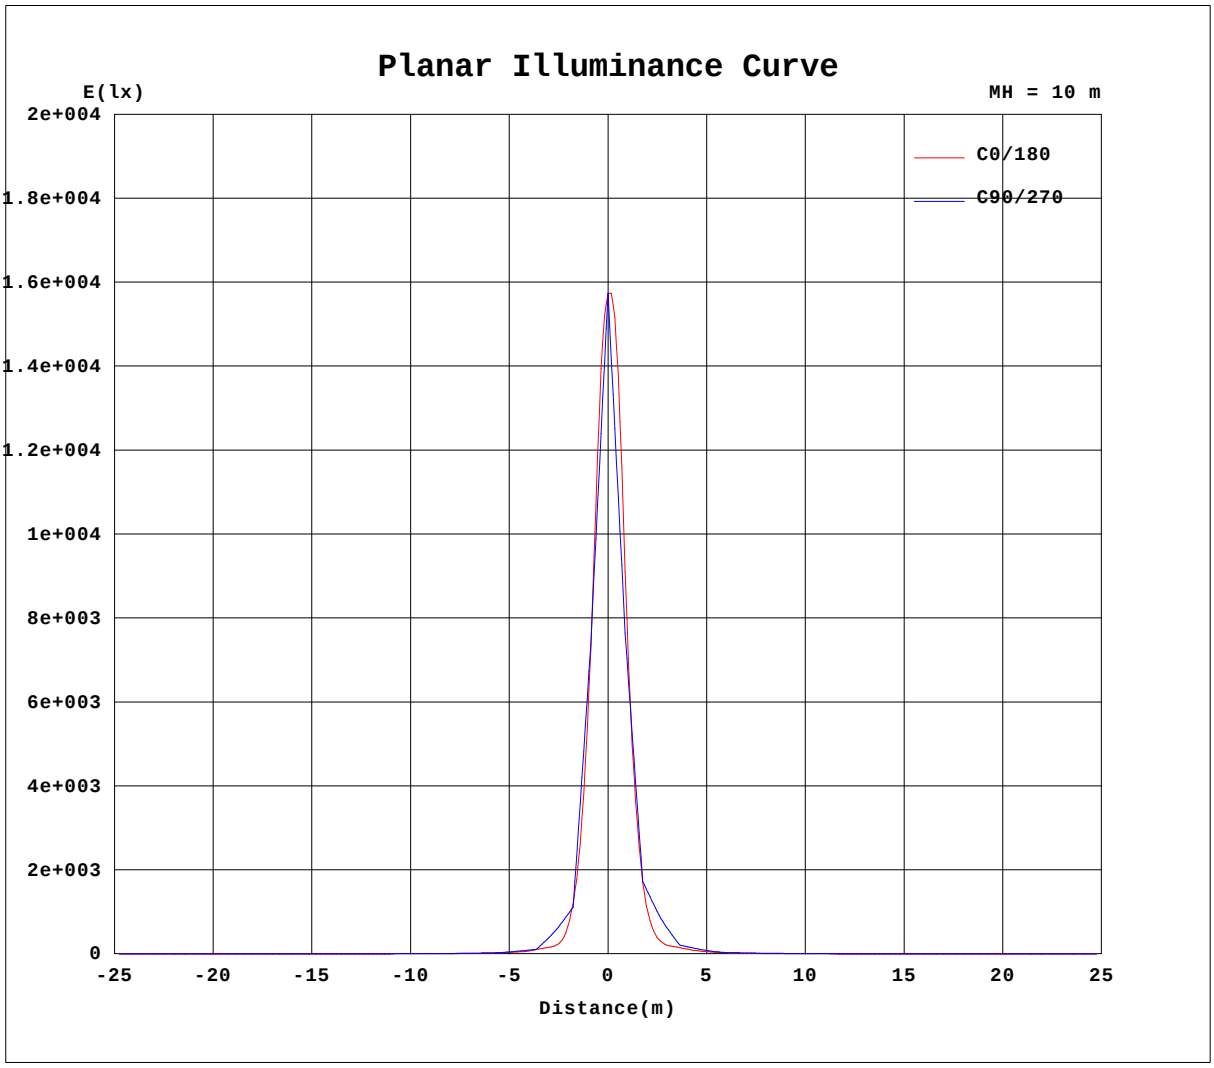


H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

AAI Figure

Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:21846 lm

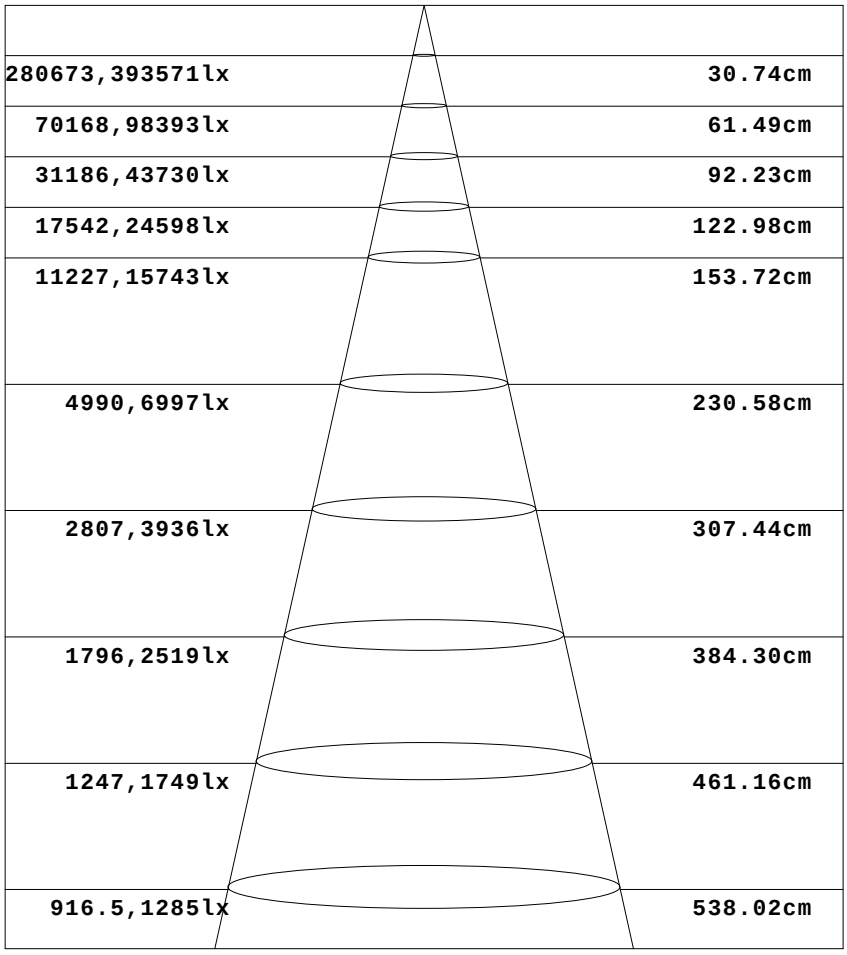

Height	Eavg,Emax	Angle:8.79deg	Diameter
2m	280673,393571lx		30.74cm
4m	70168,98393lx		61.49cm
6m	31186,43730lx		92.23cm
8m	17542,24598lx		122.98cm
10m	11227,15743lx		153.72cm
15m	4990,6997lx		230.58cm
20m	2807,3936lx		307.44cm
25m	1796,2519lx		384.30cm
30m	1247,1749lx		461.16cm
35m	916.5,1285lx		538.02cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: ×1000cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.17	0.18
-75	0.02	0.02	0.03	0.05	0.06	0.08	0.10	0.13	0.15	0.18	0.20	0.23	0.26	0.29	0.32	0.34	0.36	0.38	0.39
-70	0.01	0.02	0.04	0.06	0.09	0.12	0.16	0.20	0.24	0.28	0.32	0.37	0.42	0.47	0.52	0.55	0.58	0.59	0.60
-65	0.01	0.01	0.04	0.07	0.10	0.15	0.21	0.27	0.34	0.40	0.47	0.55	0.63	0.71	0.78	0.86	0.91	0.95	0.97
-60	0.01	0.03	0.07	0.11	0.17	0.25	0.34	0.42	0.51	0.60	0.71	0.82	0.93	1.03	1.14	1.23	1.30	1.33	1.36
-55	0.01	0.01	0.05	0.10	0.17	0.26	0.37	0.49	0.63	0.76	0.92	1.09	1.26	1.42	1.56	1.67	1.76	1.83	1.85
-50	0.00	0.04	0.09	0.17	0.27	0.40	0.55	0.72	0.90	1.11	1.34	1.58	1.79	1.98	2.13	2.23	2.32	2.35	2.38
-45	0.01	0.01	0.07	0.14	0.25	0.39	0.57	0.77	1.00	1.25	1.53	1.79	2.02	2.17	2.28	2.38	2.47	2.51	2.53
-40	0.00	0.05	0.12	0.23	0.38	0.58	0.83	1.09	1.38	1.72	2.04	2.30	2.44	2.49	2.56	2.64	2.68	2.69	2.69
-35	0.00	0.01	0.08	0.18	0.32	0.52	0.78	1.07	1.41	1.78	2.12	2.35	2.52	2.67	2.85	3.14	3.30	3.42	3.49
-30	0.00	0.06	0.15	0.29	0.48	0.75	1.09	1.45	1.86	2.27	2.51	2.61	2.78	3.04	3.50	3.86	4.07	4.23	4.30
-25	0.00	0.01	0.10	0.22	0.39	0.64	0.96	1.35	1.77	2.22	2.49	2.64	2.87	3.33	4.10	4.99	5.60	7.11	8.67
-20	0.00	0.07	0.18	0.34	0.58	0.90	1.31	1.75	2.24	2.56	2.67	2.89	3.47	4.44	5.91	6.72	8.70	12.1	13.5
-15	0.01	0.01	0.11	0.25	0.45	0.73	1.11	1.57	2.06	2.48	2.61	2.82	3.36	4.39	5.88	9.79	14.5	31.9	60.2
-10	0.01	0.07	0.19	0.37	0.64	1.00	1.44	1.96	2.46	2.60	2.76	3.27	4.37	5.93	9.60	18.6	35.7	87.0	117
-5	0.01	0.01	0.12	0.26	0.48	0.79	1.19	1.68	2.22	2.59	2.64	2.97	3.94	5.98	9.67	17.3	40.7	213	745
0	0.01	0.08	0.20	0.39	0.67	1.04	1.51	2.04	2.53	2.61	2.83	3.61	5.64	9.74	18.6	33.0	178	922	1574
5	0.00	0.01	0.12	0.26	0.48	0.79	1.20	1.70	2.24	2.61	2.67	3.00	4.02	6.12	9.91	18.2	43.3	226	773
10	0.01	0.07	0.20	0.38	0.65	1.02	1.47	2.00	2.51	2.67	2.83	3.40	4.60	6.26	10.9	20.8	52.1	131	181
15	0.00	0.01	0.11	0.25	0.46	0.75	1.14	1.61	2.12	2.55	2.71	2.93	3.55	4.70	6.34	10.9	18.1	48.1	93.8
20	0.00	0.07	0.18	0.36	0.60	0.93	1.36	1.82	2.33	2.65	2.81	3.07	3.76	4.86	6.33	7.72	13.1	22.0	26.0
25	0.01	0.01	0.10	0.23	0.41	0.67	1.01	1.41	1.86	2.32	2.61	2.81	3.10	3.64	4.50	5.48	6.84	10.9	15.4
30	0.01	0.06	0.16	0.31	0.51	0.79	1.14	1.52	1.96	2.39	2.67	2.83	3.04	3.33	3.96	4.40	4.87	5.62	6.25
35	0.01	0.01	0.09	0.19	0.34	0.55	0.82	1.12	1.48	1.88	2.25	2.54	2.75	2.96	3.21	3.64	3.97	4.46	4.93
40	0.01	0.06	0.13	0.25	0.41	0.62	0.87	1.15	1.47	1.84	2.21	2.52	2.72	2.86	3.01	3.26	3.63	3.92	3.82
45	0.01	0.01	0.08	0.15	0.27	0.42	0.61	0.82	1.06	1.33	1.64	1.95	2.22	2.42	2.59	2.76	2.97	3.21	3.32
50	0.01	0.05	0.10	0.19	0.30	0.44	0.60	0.77	0.96	1.19	1.46	1.73	1.97	2.19	2.36	2.50	2.62	2.69	2.72
55	0.01	0.01	0.06	0.11	0.19	0.29	0.41	0.54	0.67	0.82	1.00	1.20	1.39	1.57	1.73	1.86	1.97	2.05	2.10
60	0.01	0.04	0.07	0.12	0.19	0.28	0.37	0.46	0.56	0.66	0.77	0.90	1.02	1.14	1.26	1.35	1.43	1.48	1.48
65	0.01	0.01	0.04	0.07	0.12	0.17	0.24	0.30	0.38	0.45	0.52	0.61	0.70	0.79	0.88	0.95	1.02	1.06	1.09
70	0.01	0.02	0.05	0.07	0.10	0.14	0.19	0.23	0.28	0.32	0.37	0.43	0.49	0.54	0.60	0.63	0.66	0.68	0.69
75	0.01	0.01	0.02	0.04	0.06	0.08	0.11	0.14	0.16	0.19	0.22	0.26	0.29	0.33	0.36	0.39	0.41	0.42	0.43
80	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.14	0.15	0.16	0.17	0.17	0.18	0.18
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.4V I:3.456A P:751.0W PF:0.9770 Freq:49.89Hz Lamp Flux:88108.8x1 lm		
NAME: ITSP4750104000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2 UNIT: ×1000cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.03
-75	0.39	0.38	0.37	0.35	0.33	0.30	0.27	0.24	0.21	0.18	0.16	0.13	0.10	0.08	0.06	0.04	0.03	0.02
-70	0.59	0.58	0.56	0.52	0.48	0.43	0.37	0.33	0.28	0.24	0.20	0.16	0.12	0.08	0.05	0.03	0.01	0.01
-65	0.97	0.96	0.92	0.87	0.81	0.73	0.65	0.57	0.49	0.42	0.35	0.28	0.21	0.15	0.10	0.06	0.02	0.01
-60	1.34	1.30	1.22	1.15	1.05	0.94	0.82	0.71	0.60	0.51	0.41	0.32	0.23	0.16	0.09	0.05	0.01	0.01
-55	1.86	1.84	1.78	1.70	1.59	1.46	1.30	1.13	0.95	0.79	0.64	0.50	0.38	0.26	0.17	0.09	0.04	0.01
-50	2.36	2.32	2.24	2.14	1.98	1.80	1.58	1.33	1.10	0.89	0.70	0.53	0.38	0.25	0.15	0.07	0.01	0.01
-45	2.53	2.52	2.48	2.41	2.32	2.21	2.05	1.84	1.57	1.28	1.02	0.78	0.57	0.39	0.24	0.13	0.06	0.01
-40	2.69	2.68	2.66	2.58	2.53	2.45	2.29	2.04	1.70	1.35	1.04	0.78	0.54	0.34	0.20	0.09	0.02	0.01
-35	3.49	3.40	3.29	3.14	2.88	2.70	2.54	2.39	2.16	1.82	1.42	1.08	0.78	0.52	0.32	0.17	0.07	0.01
-30	4.19	3.98	3.77	3.38	3.01	2.76	2.62	2.49	2.24	1.81	1.38	1.02	0.70	0.44	0.25	0.12	0.02	0.00
-25	8.72	7.09	5.48	4.89	4.07	3.33	2.88	2.65	2.49	2.24	1.80	1.35	0.97	0.64	0.38	0.21	0.08	0.01
-20	11.6	7.95	6.39	5.52	4.14	3.32	2.82	2.63	2.51	2.16	1.66	1.22	0.82	0.51	0.29	0.13	0.03	0.00
-15	59.7	32.7	14.8	9.62	5.65	4.28	3.32	2.79	2.58	2.46	2.06	1.56	1.11	0.73	0.44	0.23	0.09	0.01
-10	76.0	31.7	17.1	7.83	5.36	3.98	3.09	2.65	2.55	2.35	1.84	1.35	0.92	0.57	0.32	0.15	0.03	0.01
-5	752	223	38.5	15.6	7.71	5.24	3.77	2.91	2.56	2.52	2.21	1.67	1.19	0.78	0.47	0.25	0.10	0.01
0	733	128	21.9	13.0	6.47	4.62	3.26	2.64	2.51	2.44	1.92	1.41	0.95	0.60	0.33	0.15	0.03	0.01
5	781	235	40.0	16.3	7.89	5.35	3.84	2.93	2.57	2.56	2.24	1.69	1.20	0.79	0.47	0.25	0.10	0.01
10	114	39.1	18.3	8.68	5.59	4.17	3.17	2.66	2.59	2.42	1.89	1.37	0.94	0.58	0.33	0.15	0.03	0.01
15	94.2	48.2	17.1	10.6	6.00	4.52	3.45	2.84	2.62	2.55	2.14	1.61	1.14	0.75	0.45	0.24	0.10	0.01
20	19.9	11.2	7.03	5.83	4.45	3.50	2.88	2.68	2.59	2.28	1.74	1.27	0.86	0.53	0.30	0.14	0.03	0.01
25	15.4	10.8	6.71	5.33	4.37	3.55	3.01	2.72	2.58	2.35	1.89	1.43	1.02	0.67	0.40	0.22	0.09	0.01
30	5.87	4.91	4.33	3.73	3.22	2.90	2.72	2.61	2.35	1.91	1.46	1.09	0.74	0.47	0.27	0.13	0.03	0.01
35	4.97	4.44	3.90	3.58	3.15	2.88	2.69	2.52	2.28	1.93	1.52	1.15	0.84	0.56	0.34	0.19	0.08	0.01
40	3.51	3.24	3.08	2.90	2.73	2.61	2.45	2.17	1.82	1.45	1.12	0.84	0.58	0.38	0.22	0.11	0.02	0.01
45	3.21	3.02	2.87	2.73	2.56	2.39	2.21	1.98	1.69	1.39	1.10	0.85	0.63	0.43	0.27	0.15	0.06	0.01
50	2.68	2.61	2.50	2.36	2.18	1.96	1.71	1.46	1.20	0.98	0.78	0.59	0.42	0.28	0.17	0.08	0.02	0.01
55	2.10	2.05	1.99	1.88	1.76	1.60	1.42	1.23	1.05	0.87	0.72	0.57	0.43	0.30	0.19	0.11	0.05	0.01
60	1.47	1.42	1.35	1.26	1.15	1.03	0.91	0.78	0.68	0.58	0.47	0.37	0.27	0.19	0.11	0.06	0.01	0.01
65	1.08	1.06	1.03	0.97	0.90	0.82	0.72	0.64	0.55	0.48	0.40	0.33	0.25	0.18	0.12	0.07	0.03	0.01
70	0.68	0.66	0.64	0.60	0.55	0.49	0.43	0.39	0.34	0.29	0.24	0.19	0.14	0.10	0.07	0.03	0.01	0.01
75	0.44	0.43	0.41	0.40	0.37	0.34	0.30	0.27	0.24	0.21	0.18	0.15	0.12	0.09	0.06	0.04	0.02	0.01
80	0.18	0.18	0.17	0.16	0.16	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.05	0.04	0.02	0.02	0.01	0.01
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:16 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks: