
Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		8831.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	35.3V x 29.5H
	At 50% of Imax	13.3V x 15.4H
	At 90% of Imax	4.2V x 7.3H
Beam Flux	Total	994.5 lumens per klm.
	To 10% of Imax	711.0 lumens per klm.
	To 50% of Imax	314.2 lumens per klm.
	To 90% of Imax	36.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

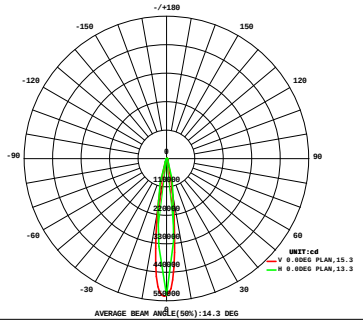

DATA OF LAMP		Eff:120.00lm/W	
MODEL		Imax(cd)	531649
NOMINAL POWER(W)	500	AVAILABILITY(%)	73.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	44440
NOMINAL FLUX(lm)	60201.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	60202
TEST VOLTAGE(V)	221.0	q @50%(H,V)	15,13DEG

AREA FLUX DIAGRAM — UNIT:lm

VERTICAL(DEG)	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG) 20	30	40	50	60	70	80	90	F t	F a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.17	0.55	1.18	2.20	3.86	5.86	7.89	9.80	11.5	12.1	11.1	9.57	7.65	5.62	3.67	2.04	0.91	0.22	95.9	0.00
70	0.12	0.58	1.85	4.37	8.17	12.8	18.2	23.4	27.3	28.2	25.4	21.0	15.7	10.6	6.34	3.11	1.12	0.20	208	0.00
60	0.14	0.88	3.13	7.56	14.4	22.9	33.3	44.3	52.6	53.4	46.9	36.8	26.5	17.5	10.0	4.68	1.54	0.23	377	0.00
50	0.17	1.28	4.68	11.5	22.1	35.5	50.2	65.1	81.3	86.2	70.6	52.3	38.8	26.0	14.6	6.48	2.02	0.26	569	0.00
40	0.16	1.58	6.14	15.7	30.6	48.3	63.9	81.2	114	136	98.3	66.7	49.0	33.9	19.5	8.42	2.59	0.33	776	0.00
30	0.15	1.84	7.44	19.6	38.5	58.5	79.9	135	277	343	199	92.6	57.9	41.1	24.6	10.8	3.37	0.45	1390	0.00
20	0.18	2.16	8.73	22.8	46.1	69.8	119	371	1547	2447	778	162	72.9	48.6	30.0	13.0	4.19	0.59	5742	3529
10	0.20	2.40	9.50	25.1	52.3	88.0	201	930	5836	9160	2190	269	89.6	55.8	33.7	14.2	4.60	0.64	18962	16984
0	0.23	2.51	9.71	25.7	54.7	95.8	228	1209	8072	10843	2322	270	91.2	56.9	34.3	14.4	4.63	0.65	23333	21509
-10	0.23	2.41	9.24	23.9	49.1	75.8	129	527	1488	1540	610	162	77.9	53.2	31.6	13.6	4.45	0.65	4798	2418
-20	0.26	2.23	8.16	20.5	40.5	66.8	98.1	168	304	342	195	112	74.2	50.5	28.0	12.4	4.12	0.65	1528	0.00
-30	0.33	2.13	6.97	16.8	33.0	57.8	88.6	124	145	135	121	97.7	70.0	44.9	24.7	11.3	3.97	0.70	984	0.00
-40	0.41	2.04	5.94	13.5	25.6	42.3	63.1	80.5	84.8	82.2	80.2	68.2	50.6	33.0	19.4	9.44	3.53	0.70	665	0.00
-50	0.41	1.75	4.53	9.42	16.6	25.8	35.6	44.4	50.1	51.1	47.3	39.4	30.1	20.7	12.8	6.63	2.67	0.59	400	0.00
-60	0.42	1.56	3.43	6.35	10.3	14.7	19.4	23.8	26.8	27.7	25.7	22.0	17.3	12.7	8.24	4.62	2.10	0.53	228	0.00
-70	0.41	1.38	2.55	3.99	5.70	7.57	9.36	11.0	12.6	13.0	11.9	10.7	9.10	7.16	5.15	3.28	1.72	0.49	117	0.00
-80	0.18	0.58	0.95	1.28	1.59	1.87	2.10	2.29	2.45	2.47	2.39	2.26	2.08	1.79	1.46	1.07	0.65	0.20	27.6	0.00
-90																				
F t	4.16	27.9	94.1	230	453	730	1246	3850	18132	25302	6835	1494	781	520	308	139	48.2	8.09	60202	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1112	15946	23332	4050	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	44440


one-half-peak spread: U:6.2,D:7.3 , L:7.8,R:7.7 **NEMA Beam Type: Type 3**

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

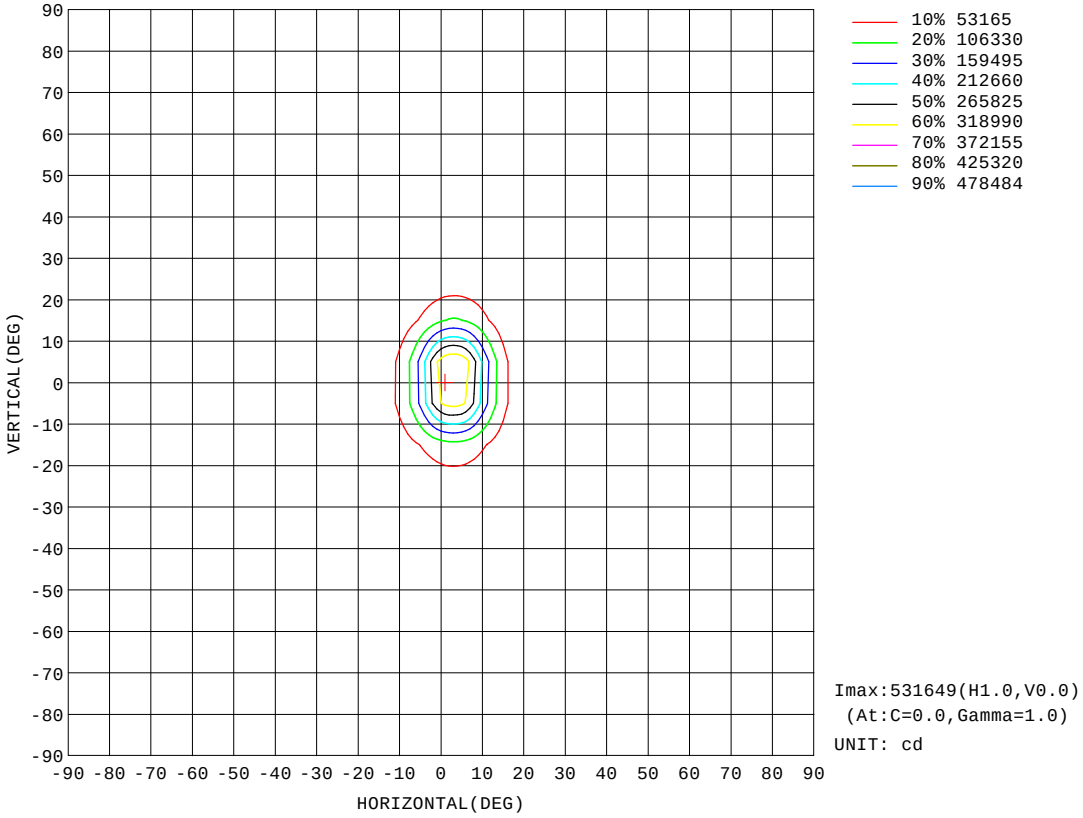


H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

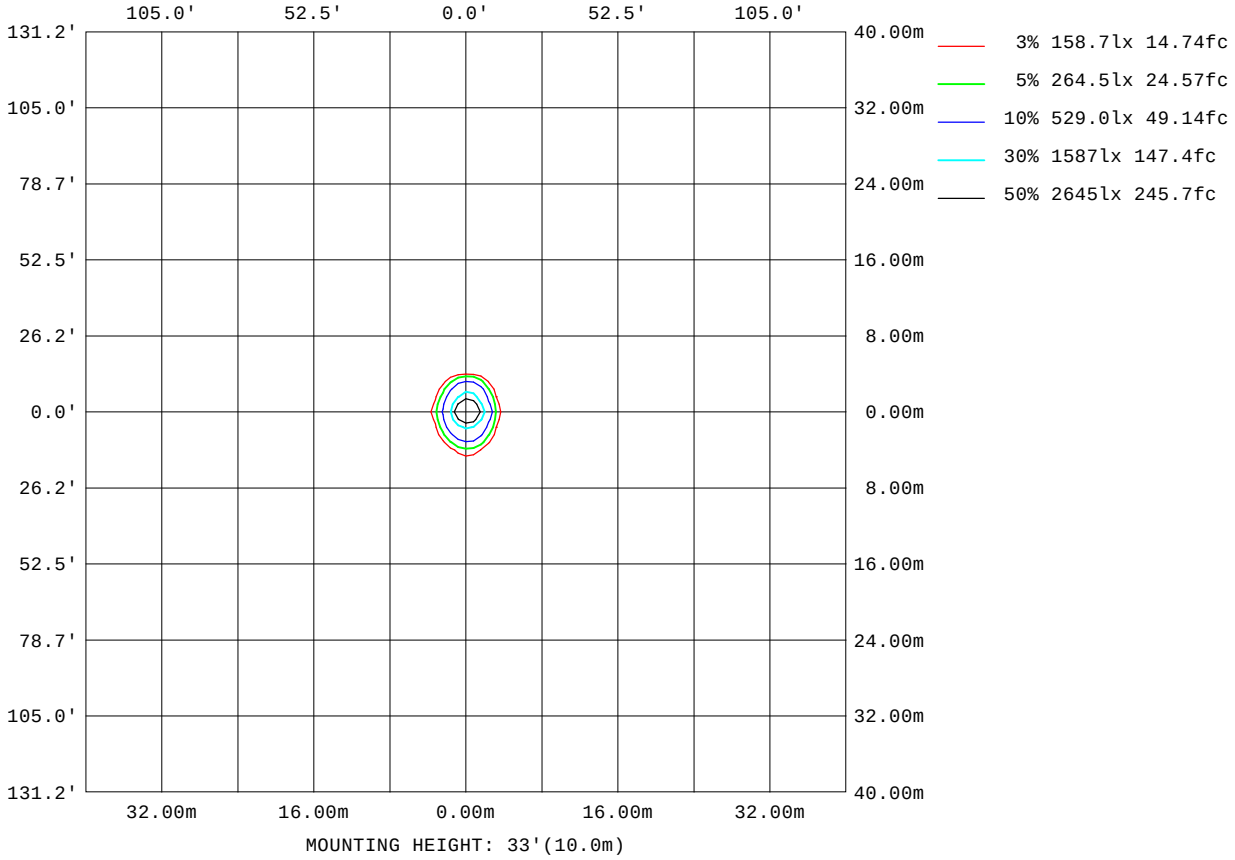

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

Planar Illuminance Curve

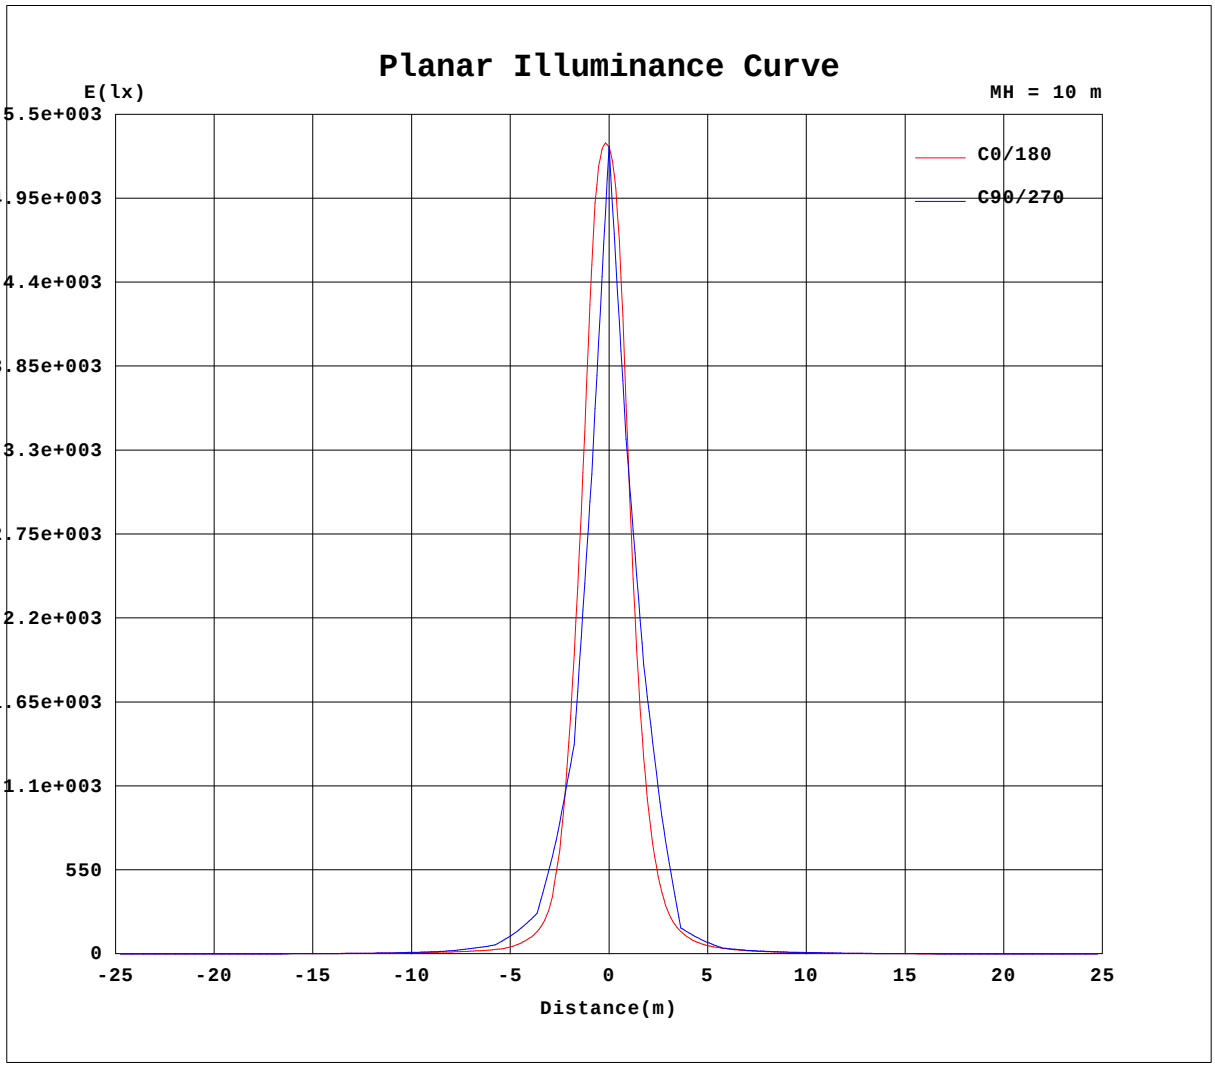


H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:17043 lm

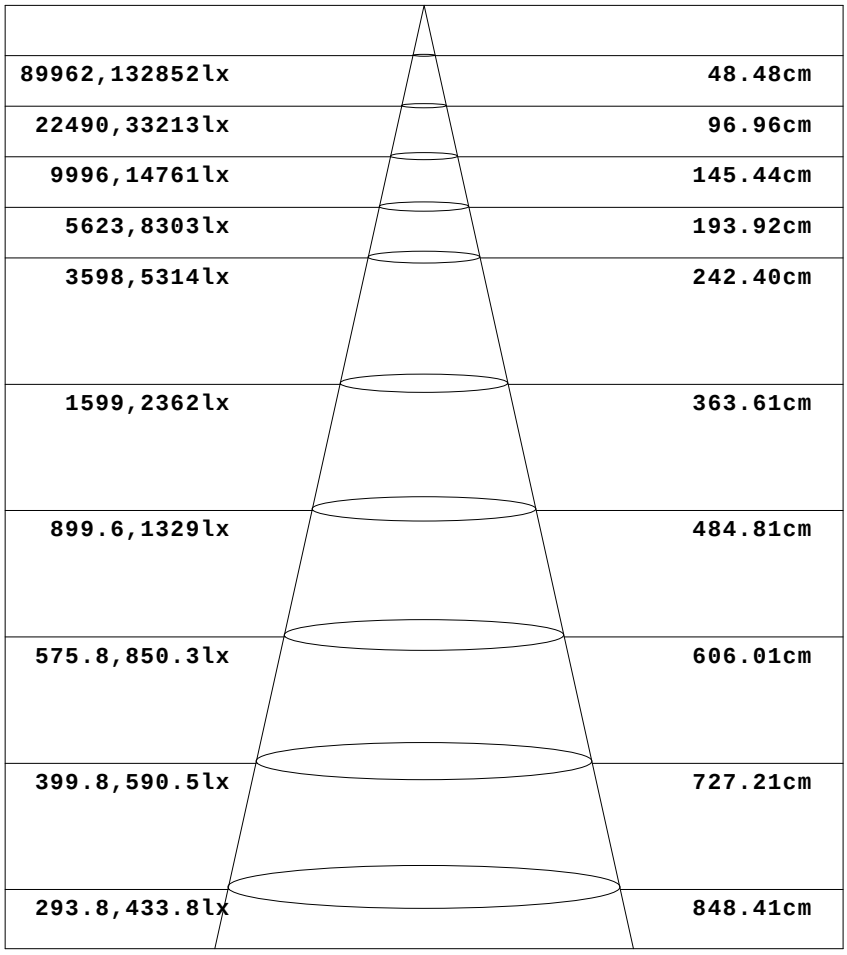

Height	Eavg,Emax	Angle:13.82deg	Diameter
2m	89962,132852lx		48.48cm
4m	22490,33213lx		96.96cm
6m	9996,14761lx		145.44cm
8m	5623,8303lx		193.92cm
10m	3598,5314lx		242.40cm
15m	1599,2362lx		363.61cm
20m	899.6,1329lx		484.81cm
25m	575.8,850.3lx		606.01cm
30m	399.8,590.5lx		727.21cm
35m	293.8,433.8lx		848.41cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: ×100cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.23	1.39	1.49	1.54	1.58	1.62	1.67	1.73	1.80	1.87	1.95	2.04	2.12	2.19	2.27	2.35	2.45	2.55	2.58
-75	1.31	1.43	1.58	1.68	1.79	1.92	2.08	2.26	2.45	2.66	2.88	3.12	3.33	3.55	3.73	3.95	4.15	4.36	4.61
-70	1.46	1.62	1.75	1.91	2.10	2.34	2.62	2.93	3.27	3.63	4.00	4.37	4.72	5.08	5.37	5.71	6.02	6.39	6.74
-65	1.40	1.50	1.67	1.88	2.17	2.54	2.99	3.51	4.06	4.67	5.31	5.94	6.54	7.17	7.77	8.35	8.89	9.25	9.63
-60	1.38	1.51	1.74	2.07	2.52	3.08	3.76	4.52	5.33	6.23	7.14	7.99	8.84	9.80	10.7	11.4	12.1	12.4	12.7
-55	1.33	1.41	1.64	2.03	2.57	3.26	4.12	5.10	6.23	7.46	8.78	10.1	11.6	13.0	14.3	15.5	16.6	17.2	17.7
-50	1.31	1.43	1.81	2.37	3.13	4.09	5.25	6.52	8.12	9.69	11.5	13.4	15.5	17.2	19.0	20.4	21.7	22.4	22.9
-45	1.30	1.32	1.64	2.25	3.09	4.15	5.48	7.06	9.02	11.1	13.4	15.9	18.8	21.7	24.4	27.0	29.0	30.4	31.3
-40	1.28	1.35	1.91	2.74	3.83	5.23	6.95	9.04	11.6	14.3	17.2	20.7	24.6	28.4	32.1	35.2	37.6	39.3	40.1
-35	1.06	1.05	1.48	2.33	3.47	4.93	6.69	8.92	11.7	14.5	17.9	21.9	26.1	30.4	34.9	41.1	48.5	57.7	65.1
-30	0.81	0.92	1.67	2.76	4.20	5.96	8.13	10.9	14.0	17.3	21.6	26.5	31.2	35.9	42.3	52.4	66.6	83.1	92.9
-25	0.66	0.68	1.24	2.36	3.78	5.65	7.89	10.7	14.2	17.8	22.0	26.3	30.0	34.8	42.6	58.7	91.6	145	198
-20	0.51	0.72	1.62	2.98	4.77	7.03	9.72	13.3	17.0	21.4	26.1	29.0	32.4	38.5	53.1	85.8	156	254	323
-15	0.47	0.53	1.18	2.48	4.18	6.36	9.03	12.4	16.6	21.5	26.1	29.5	33.8	42.1	61.4	122	283	543	820
-10	0.46	0.69	1.64	3.23	5.20	7.77	10.7	14.9	19.6	25.6	29.1	32.8	40.2	55.9	103	259	601	1067	1438
-5	0.43	0.48	1.16	2.52	4.44	6.72	9.51	13.3	18.1	24.0	28.8	33.6	43.3	61.9	105	236	654	1693	3179
0	0.44	0.66	1.63	3.23	5.41	7.81	10.9	15.6	20.7	26.8	31.7	40.7	58.0	91.7	177	448	1346	3638	5290
5	0.39	0.43	1.08	2.41	4.38	6.60	9.33	13.1	17.8	23.4	28.0	33.1	43.6	63.3	110	235	645	1754	3409
10	0.37	0.57	1.46	2.98	5.06	7.44	10.4	14.5	19.0	24.1	27.6	32.6	41.9	60.4	114	243	620	1315	1984
15	0.35	0.37	0.95	2.18	3.95	6.05	8.65	12.0	16.2	20.6	24.6	27.2	32.4	41.5	63.3	117	264	576	997
20	0.33	0.49	1.29	2.68	4.40	6.64	9.34	12.8	16.5	20.5	24.0	25.2	29.7	34.3	45.7	75.8	124	176	207
25	0.33	0.35	0.84	1.91	3.35	5.21	7.50	10.3	13.8	17.2	20.7	23.0	25.0	28.1	34.2	45.6	70.3	101	129
30	0.34	0.44	1.12	2.23	3.67	5.49	7.77	10.6	13.7	16.6	19.9	22.1	23.2	25.8	30.1	32.7	40.2	50.6	60.8
35	0.41	0.42	0.79	1.66	2.79	4.30	6.11	8.38	11.1	13.6	16.3	18.9	20.8	22.6	25.1	27.2	31.4	37.9	45.4
40	0.48	0.55	1.06	1.91	3.04	4.46	6.14	8.23	10.6	12.7	15.0	17.5	19.7	21.2	22.4	24.2	27.3	31.4	34.2
45	0.51	0.51	0.76	1.38	2.22	3.33	4.66	6.25	8.09	9.98	11.9	13.9	16.0	17.8	19.4	21.2	23.5	26.3	28.5
50	0.53	0.57	0.89	1.45	2.23	3.20	4.36	5.66	7.16	8.75	10.4	12.0	13.8	15.6	17.8	19.9	21.9	23.3	23.6
55	0.47	0.47	0.61	0.99	1.55	2.27	3.15	4.17	5.27	6.53	7.80	9.10	10.5	12.0	13.6	15.1	16.6	17.8	18.3
60	0.41	0.42	0.59	0.93	1.41	2.01	2.74	3.53	4.39	5.36	6.27	7.21	8.28	9.55	10.6	11.6	12.4	12.8	13.3
65	0.43	0.43	0.49	0.68	0.98	1.38	1.87	2.46	3.07	3.78	4.47	5.16	5.88	6.71	7.51	8.17	8.84	9.27	9.69
70	0.44	0.45	0.50	0.64	0.85	1.13	1.48	1.86	2.30	2.76	3.23	3.68	4.11	4.52	4.97	5.33	5.68	6.03	6.24
75	0.48	0.48	0.50	0.55	0.66	0.81	0.97	1.19	1.45	1.75	2.04	2.33	2.60	2.86	3.14	3.37	3.61	3.83	4.07
80	0.51	0.52	0.52	0.54	0.58	0.61	0.64	0.71	0.83	0.96	1.09	1.20	1.31	1.41	1.51	1.60	1.71	1.87	1.86
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.9V I:2.295A P:501.7W PF:0.9897 Freq:49.89Hz Lamp Flux:60201.7x1 lm		
NAME: ITSP4500154000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2 UNIT: ×100cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	2.66	2.59	2.54	2.51	2.48	2.45	2.40	2.34	2.27	2.20	2.13	2.06	1.98	1.90	1.82	1.74	1.57	1.36
-75	4.62	4.48	4.39	4.27	4.18	4.02	3.87	3.69	3.49	3.28	3.06	2.83	2.61	2.39	2.19	2.01	1.81	1.56
-70	6.47	6.32	6.15	5.95	5.74	5.47	5.20	4.89	4.54	4.18	3.81	3.43	3.07	2.72	2.42	2.16	1.83	1.63
-65	9.66	9.51	9.28	8.90	8.49	7.97	7.38	6.82	6.25	5.64	5.01	4.40	3.80	3.25	2.78	2.38	1.99	1.67
-60	12.7	12.6	12.1	11.5	10.8	10.0	9.11	8.30	7.51	6.58	5.72	4.90	4.08	3.38	2.81	2.33	1.80	1.63
-55	17.8	17.6	17.1	16.2	15.1	14.0	12.7	11.4	10.1	8.92	7.66	6.51	5.37	4.35	3.49	2.79	2.14	1.71
-50	22.8	22.4	21.3	20.0	18.5	17.0	15.3	13.4	11.8	10.3	8.64	7.20	5.81	4.60	3.58	2.78	1.95	1.72
-45	31.5	30.8	29.4	27.4	25.2	22.9	20.5	18.0	15.6	13.5	11.3	9.29	7.45	5.85	4.49	3.41	2.43	1.82
-40	39.9	38.3	36.0	33.0	30.0	26.9	23.8	20.6	17.6	15.1	12.3	9.84	7.78	5.97	4.46	3.30	2.12	1.81
-35	66.2	59.8	50.1	42.4	36.4	31.8	28.0	24.7	21.1	17.7	14.7	11.6	9.04	6.93	5.16	3.75	2.49	1.70
-30	88.8	73.7	57.3	46.8	38.8	33.4	29.5	26.0	21.8	17.9	14.5	11.1	8.56	6.41	4.61	3.19	1.77	1.51
-25	203	158	100	62.6	45.7	36.4	30.7	27.1	24.1	20.4	16.8	13.0	9.98	7.48	5.39	3.72	2.31	1.43
-20	289	195	106	61.9	44.0	34.8	28.6	26.0	23.5	19.9	16.0	12.2	9.29	6.76	4.75	3.06	1.55	1.34
-15	862	596	285	122	63.7	41.1	32.0	27.4	25.2	22.7	18.7	14.4	10.8	8.09	5.75	3.78	2.28	1.31
-10	1268	736	287	121	58.8	39.4	31.3	26.8	25.0	22.3	18.0	13.3	10.0	7.42	5.14	3.17	1.57	1.21
-5	3296	1966	713	214	94.5	49.5	35.9	29.6	26.3	24.2	20.2	15.4	11.4	8.47	6.04	3.84	2.27	1.25
0	4568	2052	584	177	81.9	45.9	35.3	29.1	26.0	23.2	18.7	13.8	10.2	7.48	5.11	3.10	1.51	1.16
5	3561	2085	719	213	96.8	49.2	35.9	29.5	25.9	23.7	19.9	15.2	11.2	8.34	5.94	3.75	2.19	1.19
10	1705	847	282	124	60.9	38.8	31.1	26.4	24.0	21.5	17.6	13.0	9.75	7.19	4.96	3.01	1.48	1.12
15	1072	678	276	115	60.9	37.5	29.8	25.1	23.0	20.9	17.7	13.8	10.3	7.63	5.37	3.47	1.98	1.05
20	189	139	89.3	51.0	35.5	29.0	24.2	21.8	20.3	18.1	15.0	11.4	8.60	6.18	4.22	2.61	1.23	0.90
25	132	107	75.3	48.1	34.2	27.4	23.7	21.0	19.7	17.3	14.7	11.5	8.62	6.31	4.38	2.84	1.54	0.75
30	60.0	49.5	37.7	30.7	26.6	22.6	20.3	19.0	17.1	14.5	12.0	9.04	6.75	4.82	3.18	1.94	0.78	0.53
35	48.2	43.3	35.0	28.2	24.9	21.8	19.6	18.0	16.2	13.8	11.6	9.02	6.74	4.92	3.36	2.13	1.09	0.45
40	34.1	30.5	25.9	22.5	20.5	19.2	17.6	15.7	13.4	11.3	9.19	6.99	5.24	3.72	2.43	1.47	0.55	0.36
45	29.0	27.3	24.2	21.2	19.0	17.4	15.8	14.2	12.3	10.5	8.64	6.80	5.16	3.79	2.59	1.64	0.85	0.37
50	23.0	21.9	19.9	17.9	16.1	14.4	12.8	11.3	9.72	8.13	6.58	5.23	3.96	2.86	1.92	1.20	0.53	0.37
55	18.2	17.5	16.4	15.0	13.6	12.3	10.9	9.68	8.42	7.20	5.93	4.79	3.74	2.79	1.98	1.31	0.76	0.41
60	12.8	12.5	11.9	11.0	10.1	9.15	8.01	7.01	6.14	5.23	4.34	3.53	2.75	2.04	1.46	0.98	0.54	0.43
65	9.69	9.37	9.01	8.47	7.90	7.21	6.48	5.75	5.08	4.43	3.74	3.09	2.48	1.92	1.44	1.03	0.70	0.47
70	6.28	6.00	5.74	5.45	5.15	4.72	4.34	3.94	3.51	3.05	2.60	2.17	1.76	1.40	1.07	0.81	0.57	0.49
75	4.12	3.99	3.84	3.67	3.51	3.27	3.04	2.81	2.55	2.28	2.00	1.73	1.46	1.22	0.99	0.81	0.65	0.53
80	1.95	1.86	1.80	1.75	1.70	1.64	1.56	1.48	1.38	1.28	1.18	1.07	0.95	0.85	0.76	0.68	0.59	0.55
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:17 February 2023

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.900m [K=1.0000]
Remarks: