
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	


DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.82 lm/W			
MODEL		Imax(cd)	777.0	S/MH(C0/180)	1.26
NOMINAL POWER(W)	22	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2250.3	η UP,DN(C0-180)	0.2,49.6
NOMINAL FLUX(lm)	2250.33	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,49.7
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	99.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

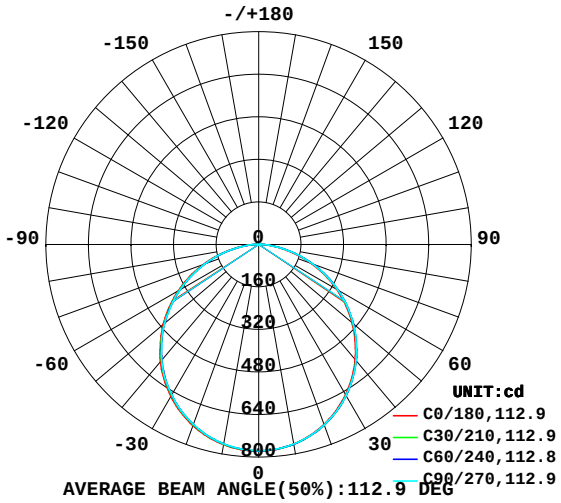

AVERAGE BEAM ANGLE(50%):112.9 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

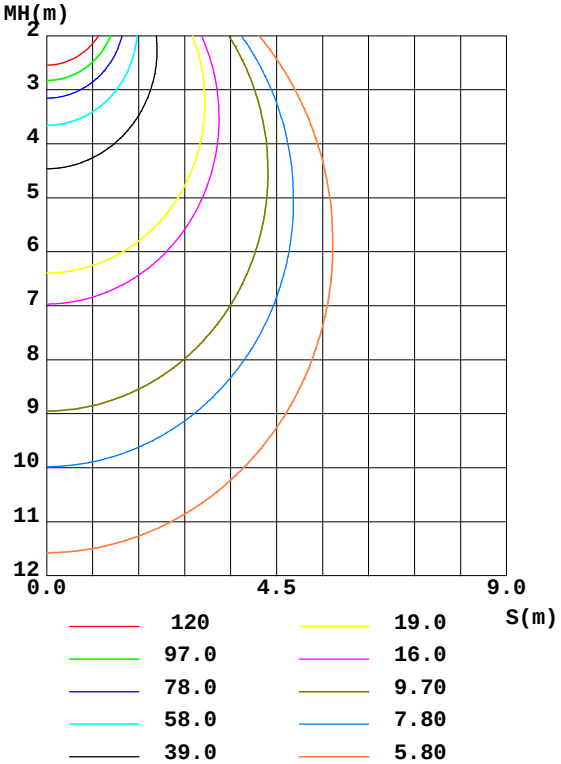

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池, PCB:A320-12S24P-V4.0, LED:亮锐普通光效

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	761.6	762.7	762.2	761.9	764.4	761.9	761.5	760.7	0- 10	73.40	73.40	3.26,3.26
20	719.7	722.1	722.1	721.6	724.9	721.1	719.8	719.5	10- 20	210.3	283.7	12.6,12.6
30	653.2	657.1	656.9	656.7	660.2	655.5	653.8	654.0	20- 30	318.7	602.3	26.8,26.8
40	565.1	570.3	569.9	570.2	574.8	568.6	568.0	567.0	30- 40	384.7	987.0	43.9,43.9
50	458.4	464.2	464.7	463.6	469.6	463.3	462.7	461.8	40- 50	399.6	1387	61.6,61.6
60	339.1	344.9	345.8	344.6	349.9	343.8	342.2	342.9	50- 60	362.0	1749	77.7,77.7
70	210.3	217.6	216.9	217.0	222.3	215.9	214.5	215.4	60- 70	277.8	2026	90.1,90.1
80	86.02	92.74	91.86	92.79	97.97	92.46	92.12	92.19	70- 80	161.7	2188	97.2,97.2
90	2.785	3.967	4.227	4.635	7.990	6.554	6.274	5.675	80- 90	46.09	2234	99.3,99.3
100	1.335	1.332	1.337	1.641	3.631	3.650	3.555	3.381	90-100	3.047	2237	99.4,99.4
110	1.368	1.365	1.361	1.652	3.530	3.532	3.463	3.299	100-110	2.606	2240	99.5,99.5
120	1.483	1.474	1.467	1.749	3.554	3.541	3.483	3.312	110-120	2.453	2242	99.6,99.6
130	1.606	1.601	1.595	1.862	3.573	3.526	3.464	3.306	120-130	2.282	2245	99.7,99.7
140	1.697	1.696	1.715	1.920	3.417	3.416	3.367	3.219	130-140	1.988	2247	99.8,99.8
150	1.836	1.802	1.882	1.998	3.232	3.209	3.187	3.053	140-150	1.597	2248	99.9,99.9
160	2.019	2.031	2.016	2.147	2.981	3.000	2.954	2.889	150-160	1.163	2249	100,100
170	2.294	2.282	2.269	2.345	2.773	2.798	2.754	2.750	160-170	0.7149	2250	100,100
180	2.504	2.499	2.490	2.505	2.507	2.497	2.488	2.504	170-180	0.2414	2250	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:***AGT-I781g-0550(550mA)+DA320/B+***电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

LUMINANCE LIMITATION CURVES

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

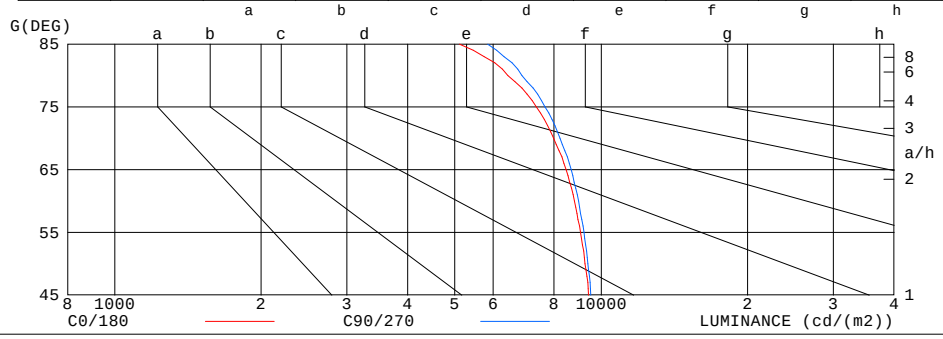

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	5111	5842
80	6433	6870
75	7352	7668
70	7985	8235
65	8471	8673
60	8809	8982
55	9074	9219
50	9261	9389
45	9423	9525


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

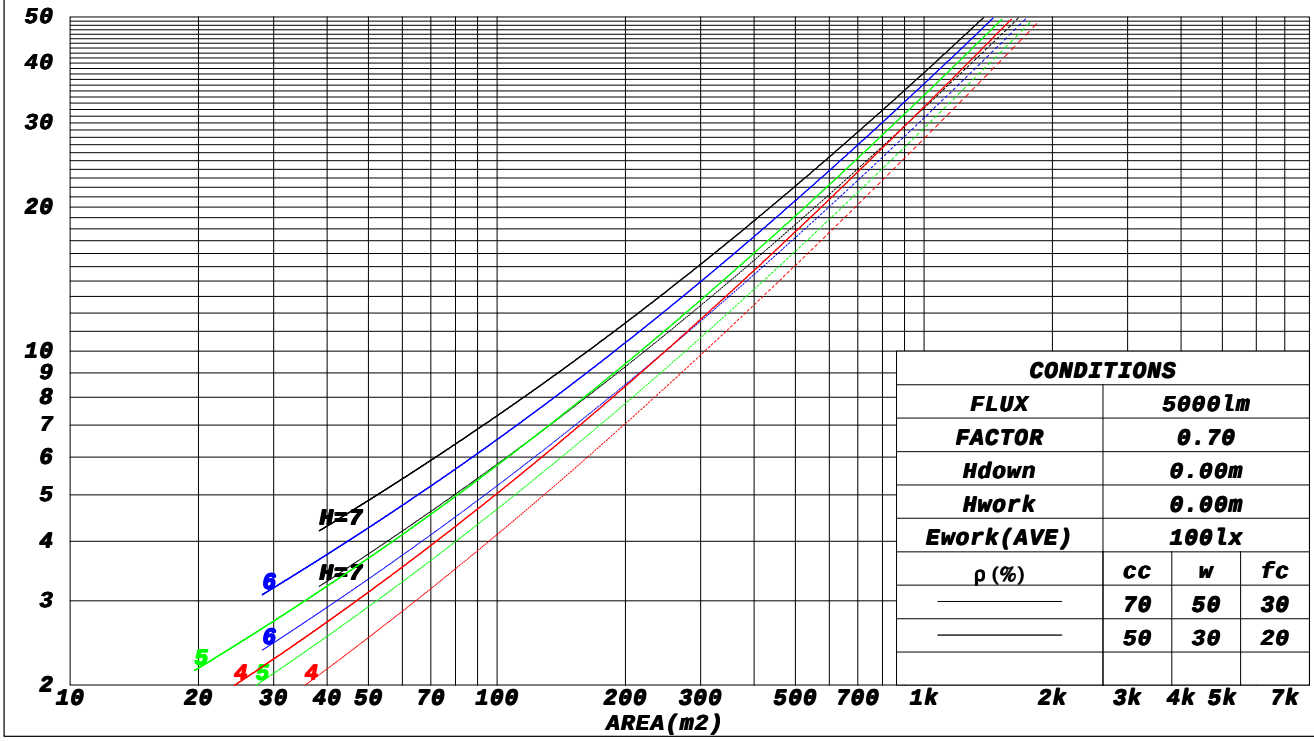

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

WEC AND CCEC

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coeffcients(WEC)												
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.167	.053	.279	.161	.052	.268	.155	.050	
2.0	.294	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.143	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.218	.114	.033	.210	.111	.033	.203	.108	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.099	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.196	.196	.196	.167	.167	.167	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.120	.109	.095	.083	.063	.055	.048	.020	.018	.016	
2.0	.178	.137	.103	.152	.118	.089	.104	.082	.062	.060	.048	.037	.019	.015	.012	
3.0	.170	.120	.080	.146	.103	.069	.100	.072	.048	.058	.042	.029	.019	.014	.009	
4.0	.163	.107	.064	.140	.092	.055	.096	.064	.039	.056	.038	.023	.018	.012	.008	
5.0	.155	.096	.053	.133	.083	.046	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.127	.076	.039	.088	.053	.028	.051	.031	.016	.016	.010	.005	
7.0	.141	.081	.039	.121	.070	.034	.084	.049	.024	.049	.029	.014	.016	.009	.005	
8.0	.135	.075	.034	.116	.065	.030	.080	.046	.021	.047	.027	.013	.015	.009	.004	
9.0	.129	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
10.0	.123	.066	.028	.106	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

UGR(Unified Glare Rating) Table

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.8	21.4	20.2	21.8	22.1	19.8	21.5	20.2	21.8	22.1
3H	21.6	23.1	22.0	23.4	23.8	21.7	23.1	22.0	23.5	23.9
4H	22.3	23.7	22.7	24.0	24.4	22.3	23.7	22.8	24.1	24.5
6H	22.8	24.0	23.2	24.4	24.8	22.9	24.1	23.3	24.5	24.9
8H	22.9	24.1	23.3	24.5	25.0	23.0	24.3	23.5	24.7	25.1
12H	23.0	24.2	23.4	24.6	25.0	23.1	24.3	23.6	24.7	25.2
4H 2H	20.5	21.8	20.9	22.2	22.6	20.5	21.9	20.9	22.2	22.6
3H	22.5	23.7	22.9	24.1	24.5	22.5	23.7	22.9	24.1	24.5
4H	23.3	24.4	23.7	24.8	25.2	23.3	24.4	23.8	24.8	25.3
6H	23.9	24.8	24.4	25.3	25.8	24.0	24.9	24.4	25.4	25.8
8H	24.1	25.0	24.6	25.4	25.9	24.2	25.1	24.7	25.5	26.0
12H	24.2	25.0	24.7	25.5	26.0	24.3	25.1	24.8	25.6	26.1
8H 4H	23.6	24.5	24.1	24.9	25.4	23.7	24.5	24.1	25.0	25.5
6H	24.4	25.1	24.9	25.6	26.1	24.4	25.1	24.9	25.6	26.1
8H	24.6	25.3	25.1	25.8	26.3	24.7	25.4	25.2	25.9	26.4
12H	24.8	25.4	25.3	25.9	26.5	24.9	25.5	25.4	26.0	26.6
12H 4H	23.7	24.4	24.2	24.9	25.4	23.7	24.5	24.2	25.0	25.5
6H	24.4	25.1	25.0	25.6	26.1	24.5	25.1	25.0	25.6	26.2
8H	24.7	25.3	25.3	25.8	26.4	24.8	25.4	25.3	25.9	26.5
CIE190: 2010										

CIE190: 2010
Area: 0.077 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

UTILIZATION FACTORS TABLE

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

ISOCANDELA DIAGRAM

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

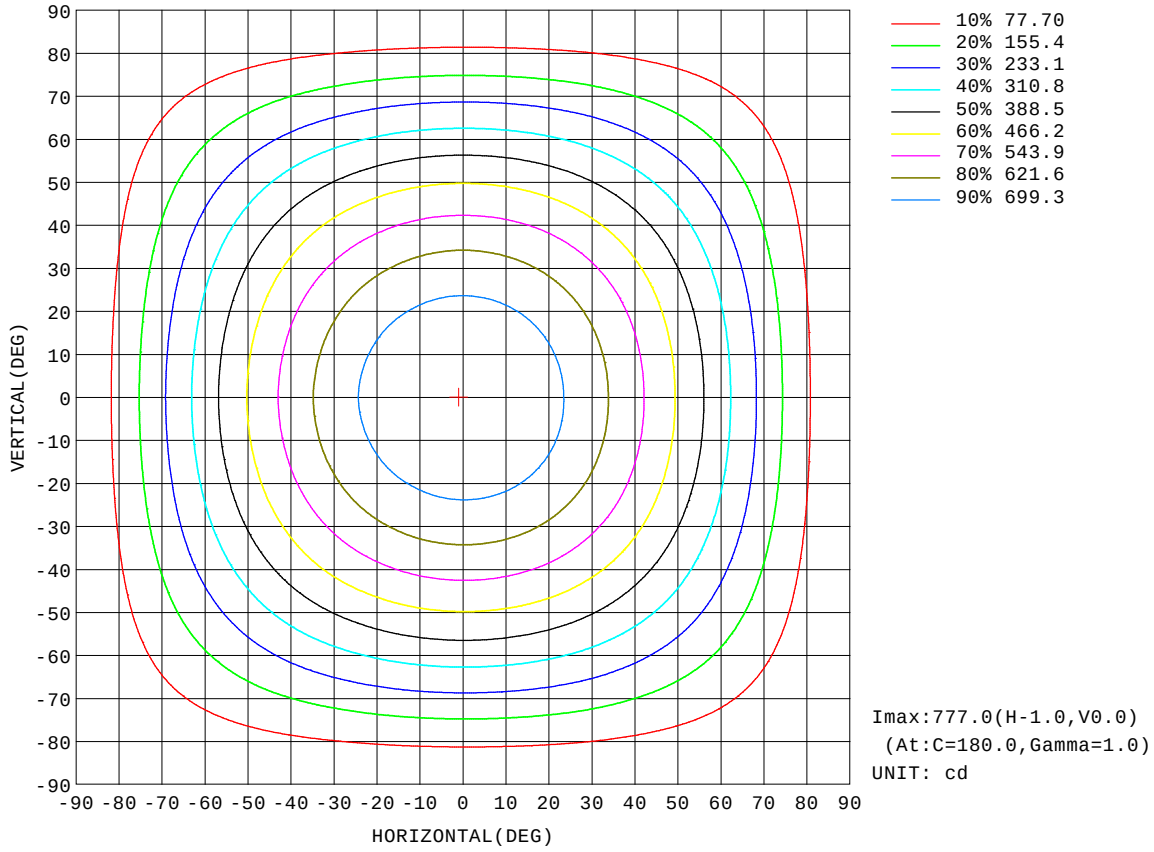


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

AAI Figure

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

Flux out:1647 lm

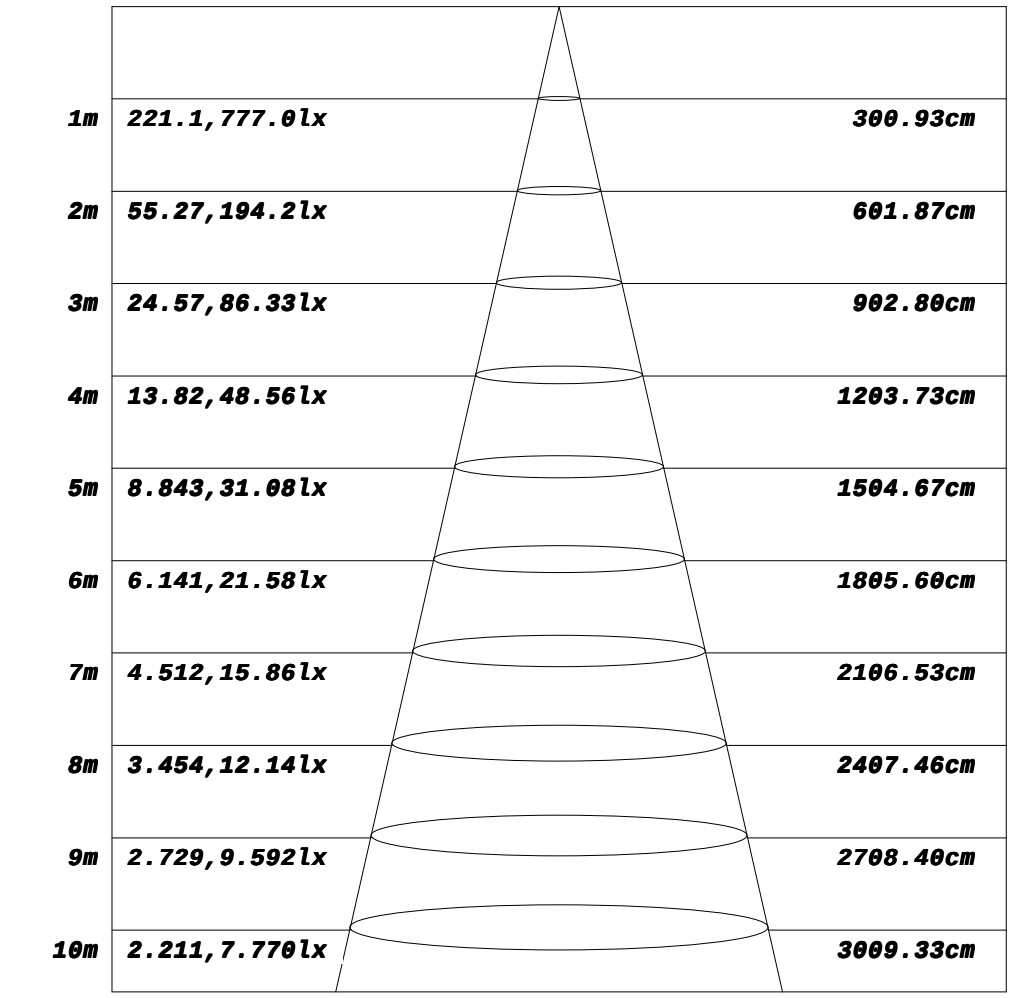


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池, PCB:A320-12S24P-V4.0, LED:亮锐普通光效

ISOLUX DIAGRAM


Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

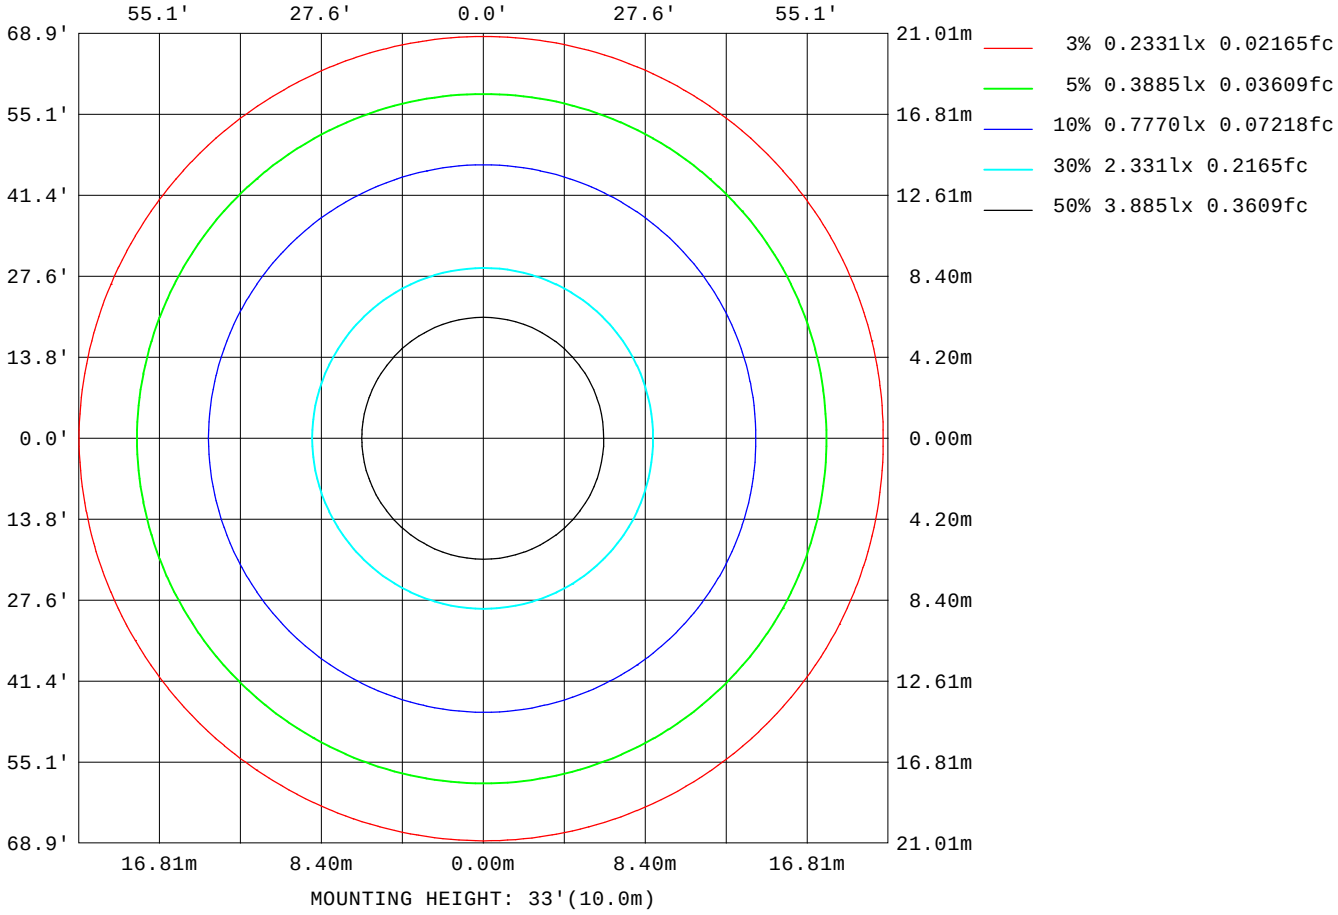

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

Planar Illuminance Curve

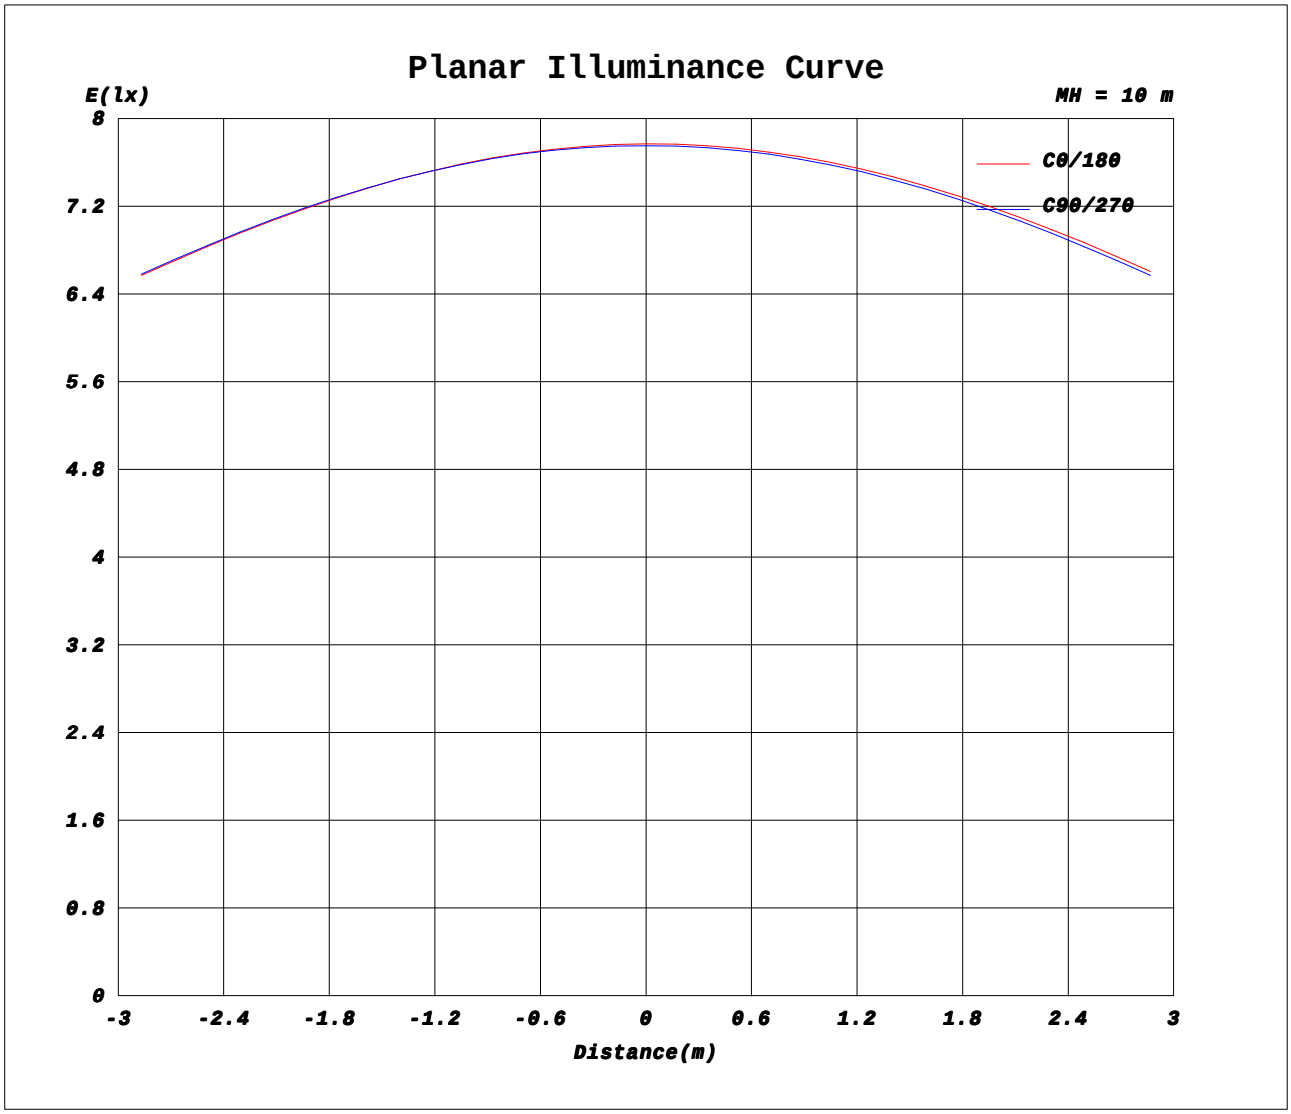

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器:AGT-I781g-0550(550mA)+DA320/B+电池,
PCB:A320-12S24P-V4.0, LED:亮锐普通光效

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.1060A P:22.100W PF:0.9340 Freq:50.00Hz Lamp Flux:2250.33x1 lm		
Name: A320 22W EME 3000K(Black)	Type: 圆柱形	
MFR.:	DIM.: Φ320*57mm	
	SUR.: Φ315mm	

Table--1 UNIT: cd

C(DEG) / γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	777	777	776	775	775	776	777	777	776	775	775	775							
5	773	773	773	772	772	772	774	773	772	772	771	771							
10	762	763	763	762	761	762	764	763	761	761	761	761							
15	744	746	746	745	745	746	748	746	744	744	743	743							
20	720	722	722	722	721	722	725	722	720	720	719	719							
25	689	692	693	693	691	693	695	692	690	691	690	689							
30	653	657	658	657	656	657	660	657	654	654	654	654							
35	611	615	617	616	615	617	620	616	613	615	614	612							
40	565	570	571	570	569	571	575	570	567	568	567	566							
45	513	518	519	519	517	519	523	519	516	517	517	516							
50	458	463	465	465	463	465	470	465	462	463	462	461							
55	401	405	407	407	405	406	411	407	403	403	404	404							
60	339	344	346	346	344	346	350	345	342	342	343	343							
65	276	281	283	282	281	283	287	282	279	280	281	280							
70	210	217	218	217	216	218	222	218	214	215	216	215							
75	147	152	154	153	152	155	159	154	151	153	153	151							
80	86.0	92.0	93.4	91.9	91.4	94.2	98.0	93.7	91.2	92.1	93.0	91.4							
85	34.3	38.3	39.7	39.2	38.3	40.5	44.3	40.9	39.0	40.0	40.3	38.6							
90	2.79	3.74	4.19	4.23	3.88	5.39	7.99	6.97	6.14	6.27	6.20	5.15							
95	1.35	1.34	1.35	1.36	1.22	2.18	3.88	4.00	3.78	3.64	3.75	3.10							
100	1.34	1.33	1.33	1.34	1.20	2.08	3.63	3.72	3.58	3.55	3.69	3.07							
105	1.34	1.34	1.34	1.34	1.21	2.06	3.56	3.64	3.51	3.51	3.64	3.03							
110	1.37	1.37	1.36	1.36	1.24	2.07	3.53	3.60	3.47	3.46	3.60	3.00							
115	1.42	1.41	1.40	1.40	1.28	2.09	3.52	3.58	3.45	3.46	3.58	3.00							
120	1.48	1.48	1.47	1.47	1.35	2.15	3.55	3.61	3.48	3.48	3.60	3.03							
125	1.54	1.54	1.54	1.53	1.42	2.21	3.58	3.62	3.48	3.49	3.59	3.04							
130	1.61	1.60	1.60	1.60	1.48	2.24	3.57	3.60	3.46	3.46	3.57	3.04							
135	1.66	1.65	1.65	1.65	1.54	2.25	3.51	3.54	3.42	3.43	3.52	3.01							
140	1.70	1.69	1.70	1.71	1.59	2.25	3.42	3.47	3.36	3.37	3.46	2.98							
145	1.76	1.73	1.76	1.80	1.67	2.25	3.33	3.37	3.28	3.30	3.36	2.91							
150	1.84	1.79	1.82	1.88	1.74	2.26	3.23	3.25	3.17	3.19	3.25	2.86							
155	1.90	1.90	1.89	1.90	1.89	2.35	3.08	3.12	3.08	3.10	3.15	2.80							
160	2.02	2.03	2.03	2.02	1.96	2.33	2.98	3.03	2.97	2.95	3.02	2.76							
165	2.15	2.17	2.16	2.14	2.10	2.38	2.88	2.93	2.89	2.86	2.91	2.71							
170	2.29	2.29	2.28	2.27	2.25	2.44	2.77	2.81	2.78	2.75	2.81	2.69							
175	2.41	2.40	2.39	2.39	2.38	2.49	2.65	2.66	2.63	2.62	2.65	2.59							
180	2.50	2.50	2.50	2.49	2.50	2.51	2.51	2.50	2.49	2.49	2.50	2.51							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-11-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电器***:AGT-I781g-0550(550mA)+DA320/B+***电池，
PCB:A320-12S24P-V4.0, LED:亮锐普通光效